



Professional Series stainless steel microwave double combination oven.

**FEATURES & BENEFITS**

Metal knobs, professional handles and analog clock coordinate with Thermador's Professional Series

Massive 4.7 cu. ft. oven cavity

Concealed bake element for enlarged capacity

Exclusive, dishwasher-safe, professional-quality rotisserie supports up to 12 lbs.

Totally recessed 5,000-watt, 12 pass MaxBroil™ element offers the most powerful and even heating on the market

New True Convection baffle system directs heat precisely and evenly


New Speed Convection mode reduces cooking time up for frozen foods to 30%

Ball bearing full-extension telescopic rack

Integrated convection microwave

Easy installation in one cabinet cutout

|                                 |                    |
|---------------------------------|--------------------|
| SKU                             | POM301             |
| Size                            | 30"                |
| Type                            | Double Combination |
| Color-Stainless Steel           | POM301             |
| Cavity Size*                    | 4.7 cu. ft.        |
| Control                         | Professional-Style |
| Display                         | -                  |
| <b>COMBINATION</b>              |                    |
| Microwave                       | Convection         |
| <b>MAIN FEATURES</b>            |                    |
| Professional Design             | ■                  |
| True Convection                 | ■                  |
| Speed Convection                | ■                  |
| Rotisserie                      | ■                  |
| MaxBroil                        | ■                  |
| Convection Broil                | -                  |
| Max Convection Broil            | ■                  |
| Convection Roast                | ■                  |
| Bake, Roast                     | ■                  |
| Broil                           | -                  |
| Warm                            | ■                  |
| Fast Preheat                    | -                  |
| Dehydrate                       | ■                  |
| Meat Probe                      | -                  |
| Self-Clean                      | ■                  |
| Self-Clean Rack Supports        | ■                  |
| Full Access® Telescopic Racks** | 1                  |
| Professional-Style Racks        | 2                  |
| Porcelain Broiler Pan           | ■                  |
| Halogen Lighting Per Cavity     | 4                  |
| Concealed Bake Element          | ■                  |

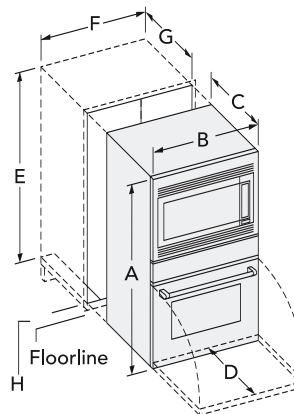

| Model No.              | Overall Dimensions |                                |                                |    | Cutout Dimensions***           |                                |    |                                   | Door Handle Projection         | Dual-Rated 120/208-240V, 4 Wire, 60 Hz. | Amps |
|------------------------|--------------------|--------------------------------|--------------------------------|----|--------------------------------|--------------------------------|----|-----------------------------------|--------------------------------|---|------|
|                        | A                  | B                              | C                              | D  | E                              | F                              | G  | H                                 |                                |   |      |
| Professional<br>POM301 | 50                 | 29 <sup>3</sup> / <sub>4</sub> | 23 <sup>7</sup> / <sub>8</sub> | 22 | 49 <sup>1</sup> / <sub>2</sub> | 28 <sup>1</sup> / <sub>2</sub> | 24 | 4 <sup>3</sup> / <sub>4</sub> min | 4 <sup>1</sup> / <sub>16</sub> | ■                                       | 40   |

BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature (or you may contact your account manager for further details). **Notes:** All height, width and depth dimensions are shown in inches. \*According to AHAM standards. \*\*Available as separate accessory TLSCPRCK30. \*\*\*Please refer to installation instructions prior to making cutout.